


Nut Transfer System Options

Interchangeable Ball Nut for all Screw Accuracy Grades

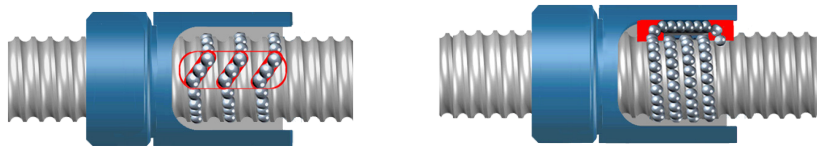

Nut E: Miniature Insert Transfer
(Leads 1, 2, 2.5mm)

Nut F: Miniature Nose Thread
(Lead 4mm)

Shaft Diameter (mm)	Lead (mm)	Series	Accuracy Grade	NUT STYLE	Max length (mm)	L ₁ (mm)	L _n (mm)	L _m (mm)	D ₁ (mm)	d ₁ (mm)	d ₃ (mm)	M	WIPERS	AXIAL PLAY MAX	LOAD RATING	
															DYN daN	STATIC daN
06	010	JTm	3	E	150	120	21	6	14.5	5.9	5.3	M12X1	NO	x	70	100
08	010	JTm	3	E	330	300	26	8	16.5	8	7.4	M14X1	NO	x	120	200
08	020	JTm	3	E	330	300	27	8	16.5	8	6.9	M14X1	NO	x	190	240
08	025	JTm	3	E	330	300	32	8	16.5	8	6.9	M14X1	NO	x	190	240
10	020	JTm	3	E	400	380	27	8	20.5	9.8	8.7	M17X1	NO	x	210	300
10	025	JTm	3	E	400	380	32	8	20.5	9.8	8.2	M17X1	NO	x	310	400
12	020	JTm	3	E	400	380	29	10	22	11.8	10.7	M18X1	NO	x	240	380
12	025	JTm	3	F	400	380	36	10	26	11.8	10.2	M22X1	YES	x	360	530
12	040	JTm	3	F	400	380	36	10	26	11.8	10.2	M22X1	YES	x	360	530
12	050	JTm	3	E	400	380	40	10	26	11.5	9.8	M22X1	YES	x	380	560
14	020	JTm	3	E	780	750	32	10	26	13.8	12.6	M22X1	YES	x	250	450
14	040	JTm	3	F	780	750	36	10	26	13.8	12.1	M22X1	YES	x	400	650
16	020	JTm	3	E	600	500	29	10	26	15.6	14.5	M22X1	NO	x	270	510
16	025	JTm	3	E	600	500	36	10	26	15.6	14	M22X1	YES	x	430	750
16	040	JTm	3	F	600	500	36	10	28	15.4	13.4	M25X1.5	YES	x	680	1140

Ordering Example

Series	Accuracy Grade	Screw Shaft Dia (mm) 2-digit #	Shaft Lead (mm) 2 or 3 digit #	Thread Direction R=Right-hand (Standard) L=Left-hand	Overall Screw Shaft Length (mm)	Thread Length (mm)	S=Shaft only N=Nut only A= Assembly (shaft and nut)	Nut Style (A, B, C, D, E, F)	"SPL" Special with Options (different from Catalog)
JTm	3	08	010	R	330	X 300	A	E	
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩